


## **CABLE REELS**

### **Features**

- strong
- durable
- light weight
- low cost
- corrosion resistant materials
- base unit 23 kgs.
- options
  
- powered with remote hand control
  - lifting bar
  - level wind
  - encoder
- easy changing of cables
- same cable can be used with or without the reel system

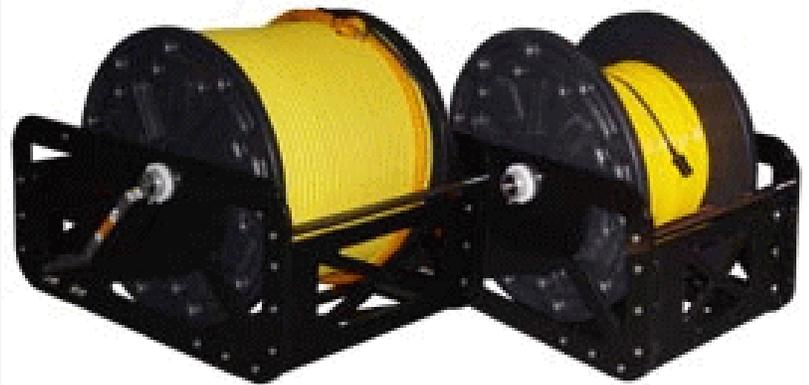

These reels will handle cables for small ROVs, camera systems, sonar equipment as well as many other applications. They are available in two drum sizes (11" x 24" and 19" x 24" both with 11 inch cores). Options included, power or manual drive, level wind, lifting bar, and an encoder for metering the cable payout.



23 Nihan Dr., Unit 4 St. Catharines,  
Ontario, Canada. L2N 1L2  
Phone: (905) 687-6672  
Fax: (905) 687-9742  
E-mail: sales@sharkmarine.com



**Reel Specifications:**

Reel Size	29.2cm/11.5inch	48.25cm /19inch
Height :		
without handle	64.75cm /25.5 inches	64.75cm /25.5 inches
with handle	82.5cm 32.5 inches)	82.5cm /32.5 inches
Width	58.4cm (23 inches)	75cm /29.5 inches
Length	87.6cm (34.5 inches) without drive motor	87.6cm /34.5 inches without drive
	90.17cm (35.5 inches) with drive motor	90.17cm/35.5 inches with drive motor
Weight	22.25kg(49 lbs) empty no drive motor	24.5kg /54 lbs empty no drive motor
	36kg (79 lbs) empty with drive motor	38kg/84 lbs empty with drive motor
Drive Speed	Maximum 73m/min(240ft/min) Minimum 3.5m/min(12ft/min)	
Bollard Pull	Max 45.3kg (100lbs) (Adjustable)	

**Options**

Motor Drive: weather resistant 120vac, ½ hp DC motor, with variable speed & dual directional hand control. Drive Speed Maximum (240ft/min), Minimum (12ft/min) Minimum power required 450w 120 vac.

Level Wind: manages the cable during input and output to ensure an even wind on the reel.

Cable Encoder: tracks the cable output and displays it on the controller or optional RS-232 output to computer

Optional deck cable/hand controller pouch.

**Capacities for common Shark Marine cables**

Core Size	Sonar .320	Camera .400	Stealth .550	SeaWolf .830
24"x10"x11"core	2500'	1500'	500'	250'
24"x19"x11"core	5000'	3000'	1500'	500'

Figures are based on a perfect wind to the outside edge of reel.